



- Single Pole High Density Matrix - Up To 4096 Crosspoints
- Dual Analog Bus
- Matrix Size 128x8 to 512x8 (60-550)
- Matrix Size 128x4 to 512x4 (60-551)
- Uses High Quality Electro-Mechanical Relays
- Switch up to 300VDC/250VAC and up to 60W Max Power

The 60-550 is a high density single pole 512x8 matrix suitable for signal routing in large ATE systems. It is easily expanded to produce larger sizes, for example, two units can be linked to create a 1024x8 matrix. The 60-551 has an identical architecture to the 60-550 but has a 4-wire instead of an 8-wire Y-bus.

The matrix is constructed from 64x8 or 64x4 sub assemblies, permitting it to be supplied in a variety of sizes from 128 to 512 X connections in increments of 64.

Dual Analog Bus

The Y connections of the sub-matrices can be connected to one of two analog buses (Dual Analog Bus). These can be used to maximize bandwidth by disconnecting unused sub matrices from the bus in use. They also provide configuration flexibility by giving the potential to divide the 60-550/551 into two independent matrices whose size can be set by the user in increments of 64 X connections.

The 60-550/551 is designed in accordance with the LXI Standard 1.4 and is supplied in a 1U high, full rack width case with 500mm depth.

- Maximum Switch Current of 2A
- 1U Rack Mountable Enclosure
- LXI Standard 1.4 Compliant
- IVI & Direct I/O Drivers
- Supported by *BIRST*™ & *eBIRST*™ Test Tools
- 3 Year Warranty

It is programmable via the LAN interface using Pickering Interfaces' generic switch driver. Industry standard (W3C) web browsers can be used to access and change configuration information and provide access to the soft front panels.

The 60-550/551 is ideal for applications where a simple start-up is required and for applications requiring control over large distances.

Built-In Relay Self-Test - *BIRST*


The *BIRST* facility provides a quick and simple way of finding relay failures. No test equipment is required, simply un-plug the user connectors, launch the *BIRST* application and the tool will run a diagnostic test that will find all relays with faulty contacts.

For more information go to: pickeringtest.com/birst

Supported by *eBIRST*

In addition to *BIRST*, these matrices are also supported by *eBIRST*. These tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

For more information go to: pickeringtest.com/ebirst

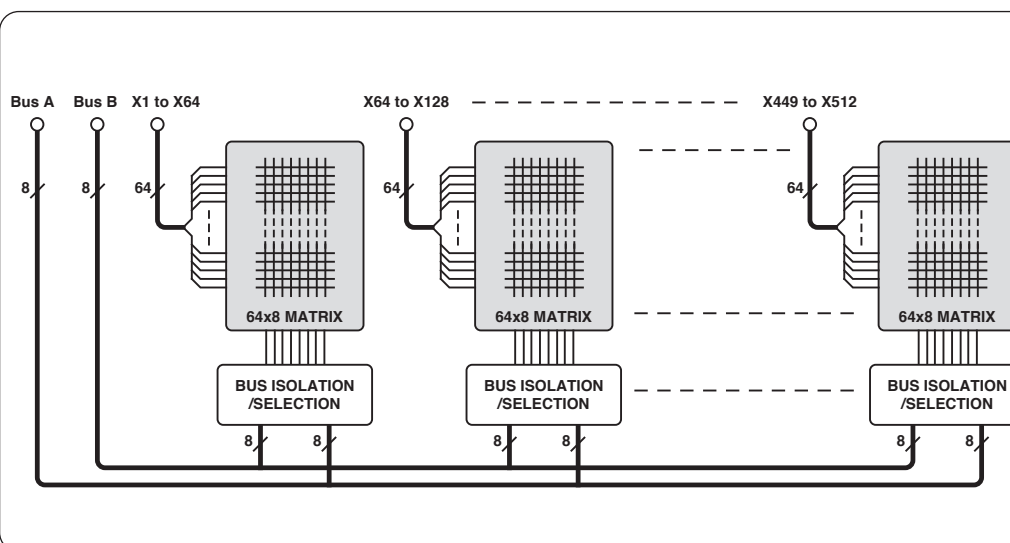


60-550 Single Pole 512x8 EMR Matrix Schematic Diagram. The 60-550 has up to eight 64x8 sub-matrices linked by two analog buses. Isolation/ Selection switches allow the Y bus of a sub-matrix to be connected to Bus A, Bus B or isolated from the other sub-matrices. The 60-551 has the same topology but with 64x4 sub-matrices and 4-wire analog buses.

Matrix Expansion

The 60-550/551 may be expanded to larger matrix sizes by using cabling to daisy-chain the Y signals.

The illustrations below show four 60-550-008 512x8 matrices interconnected as a 2048x8 matrix using specially constructed cables.

The first diagram shows the matrix schematic and the second diagram shows how the front panel connectors are cabled together.

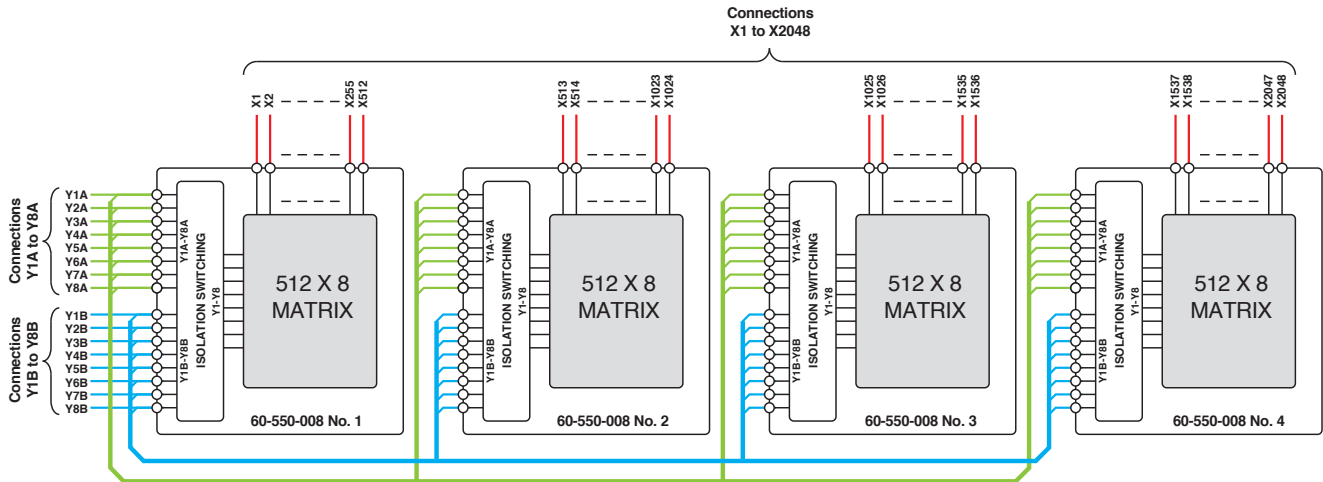

Schematic Diagram of four 60-550-008 matrices connected as a single 2048x8 matrix, the 60-550 is fitted with Dual 8-pole Analog Buses

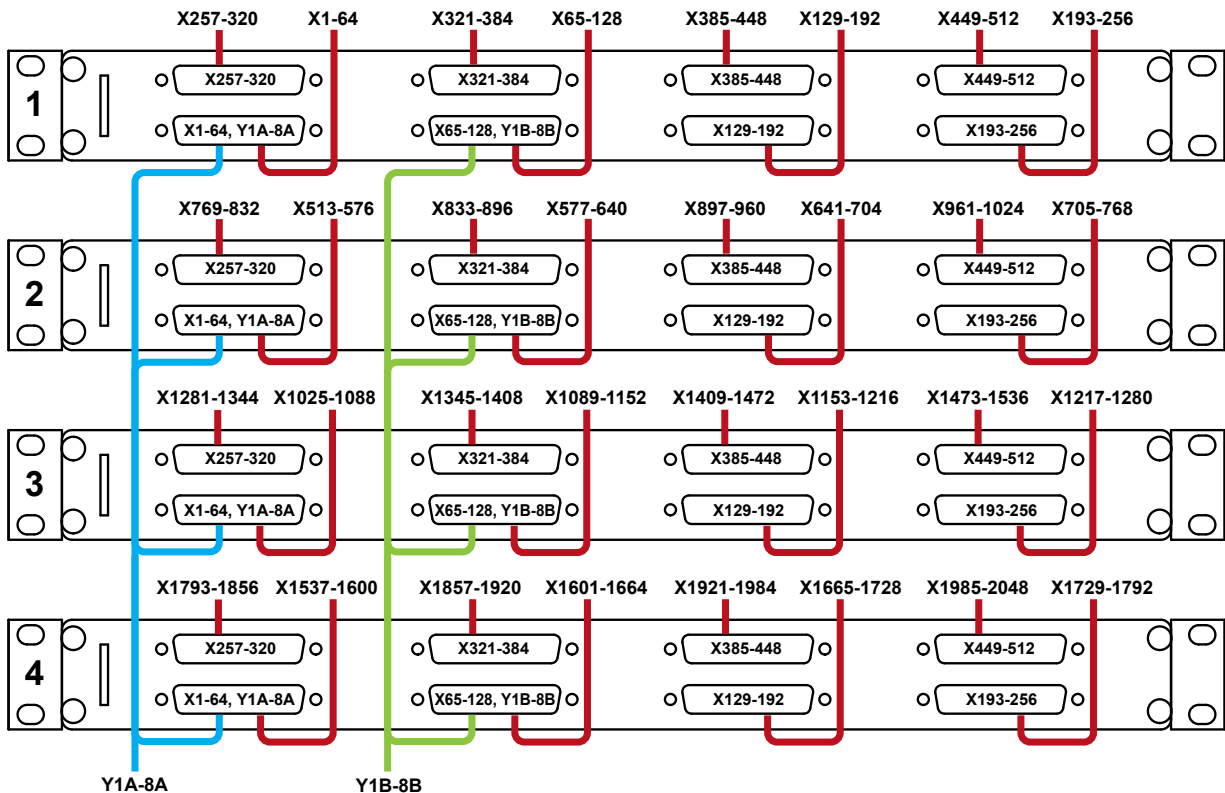


Diagram showing the front panel cabling required to interconnect four 60-550-008 matrices as a single 2048x8 matrix

Relay Type

The 60-550/551 is fitted with high quality electro-mechanical relays. These relays are leaded types (not surface mount) so field maintenance is greatly simplified. Spare relays are built onto the circuit board to allow easy maintenance with minimum downtime.

Switching Specification

Switch Type	Electro-mechanical
Contact Type:	Palladium-Ruthenium, Gold Covered Bifurcated
Max Switch Voltage:	300VDC/250VAC*
Max Power:	62.5VA, 60W from 30V to 220VDC, 30W to 300VDC (resistive load)
Max Switch Current:	2A
Max Continuous Carry Current:	2A
Max Pulsed Carry Current	
Example (for a single switch path):	6A for 100ms (up to 10% duty cycle)
Initial Path Resistance - On:	<1Ω (X to X)†
Initial Path Resistance - Off:	>10 ⁹ Ω
Minimum Voltage:	100μV
Thermal Offset:	<5μV
Operate Times	
Crosspoint Relay:	3ms
Crosspoint + Isolation Relay:	6ms
Expected Life (operations)	
Very low power signal load:	>1x10 ⁸
Low power load (2W):	>1.5x10 ⁷ (0.1A 20VDC)
Medium power load (30W):	>5x10 ⁶ (1A 30VDC)
Full power load (60W):	>1x10 ⁵ (2A 30VDC)
	>1x10 ⁵ (0.1A 300VDC)
Bandwidth:	5MHz typical (fully populated)
Max Number of simultaneously closed crosspoints:	526 (BIRST versions) 100†† (non BIRST versions)

* For full voltage rating, signal sources to be switched must be fully isolated from mains supply and safety earth.

† Path resistance is dependent upon the signal route selected.

†† Higher closure counts are possible, please contact sales office for further information.

Power Source

Universal AC mains supply, 90-120/200-240V 50-60Hz	
Power Inlet:	Male IEC connector
Power Rating:	100VA maximum
Fuse Rating:	(F) 5A, 250V

LAN Interface

Compliant to LXI Standard 1.4, the 60-550/551 has a 1000Base-T Ethernet Interface via a standard RJ-45 connector mounted on the rear panel with an LCD display showing the unit's IP address.*

***Note:** Legacy units may not have 1000Base-T support or be fitted with an LCD display.

400Hz Operation

For applications requiring the operation of the unit from a 400Hz supply, for example aircraft or marine supplies, an alternative PSU build is available. Please contact your local sales office for details.

Mechanical Characteristics

Supplied with front panel ears to enable rack mounting on a shelf or other rear support mechanism.

Dimensions: 1U high, full rack width, 500mm depth

3D models for all versions in a variety of popular file formats are available on request.

Connectors

Signals via front panel connectors.

X and Y connections are via 8 x 78-pin male D-types. (Y connections are on the first two X signal connectors).

For pin outs please refer to the operating manual.

Operating/Storage Conditions

Operating Conditions

Operating Temperature: 0°C to +55°C

Humidity: Up to 90% non-condensing

Altitude: 5000m

Storage and Transport Conditions

Storage Temperature: -20°C to +75°C

Humidity: Up to 90% non-condensing

Altitude: 15000m

Safety & CE Compliance

All products are fully CE compliant and meet applicable EU directives: Low-voltage safety EN61010-1:2010, EMC Immunity EN61326-1:2013, Emissions EN55011:2009+A1:2010.

Product Order Codes

LXI High Density 128x8 EMR Matrix	60-550-022
LXI High Density 192x8 EMR Matrix	60-550-023
LXI High Density 256x8 EMR Matrix	60-550-024
LXI High Density 320x8 EMR Matrix	60-550-025
LXI High Density 384x8 EMR Matrix	60-550-026
LXI High Density 448x8 EMR Matrix	60-550-027
LXI High Density 512x8 EMR Matrix	60-550-028
LXI High Density 128x4 EMR Matrix	60-551-022
LXI High Density 192x4 EMR Matrix	60-551-023
LXI High Density 256x4 EMR Matrix	60-551-024
LXI High Density 320x4 EMR Matrix	60-551-025
LXI High Density 384x4 EMR Matrix	60-551-026
LXI High Density 448x4 EMR Matrix	60-551-027
LXI High Density 512x4 EMR Matrix	60-551-028

Product Customization

Pickering LXI units are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

Customization can include:

- Alternative relay types
- Mixture of relay types
- Alternative number of relays
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.

Support Products

eBIRST Switching System Test Tool

This product is supported by the eBIRST test tools which simplify the identification of failed relays, the required eBIRST tools are below. This product requires master slave testing and one set of each tool is required together with the master slave cable **93-970-301**. For more information go to: pickeringtest.com/ebirst

Product	Test Tool	Adaptor
60-550	93-006-001	Not Required

Spare Relay Kits

Kits of replacement relays are available for the majority of Pickering's switching products, simplifying servicing and reducing down-time.

Product	Relay Kit
60-550	91-100-001

For further assistance, please contact your local Pickering sales office.


Mating Connectors & Cabling

For connection accessories for the 60-550/551 please refer to the **90-006D** 78-pin D-type Connector Accessories data sheet where a complete list and documentation can be found for accessories, or refer to the Connection Solutions catalog.

Soft Front Panel for the 60-550 Matrix - can be executed as a Java applet from the device's LXI homepage and allows graphical control of the matrix

Connectivity Solutions


We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with 1200+ products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules.



Connectors & Backshells



Multiwire Cable Assemblies



RF Cable Assemblies



Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

Visit: pickeringtest.com/cdt to start your design.

Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for a PXI or LXI based test system. Our modules are fully supported by both Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our sister company, Pickering Electronics. These instrument grade reed relays feature **SoftCenter®** technology, ensuring long service life and repeatable contact performance.

To learn more, please go to: pickeringrelay.com

Programming

All LXI devices are supplied with built-in software drivers, web pages for configuration and soft front panels as required by the LXI specification. A variety of drivers are provided (C, .NET, IVI, SOAP) which are compatible with all Microsoft supported versions of Windows and popular older versions. For a list of all supporting operating systems, please see: pickeringtest.com/os

The drivers may be used in many commonly used programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++, Visual C#)
- **Keysight** VEE and OpenTAP
- **Mathworks** Matlab
- **Marvin** ATEasy
- **MTQ Testsolutions** Tecap Test & Measurement Suite

As well as various open source environments such as:

- **Sharp Develop**
- **Dev-C++**

To learn more about software drivers and development environments, please go to: pickeringtest.com/software



Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more, please go to: pickeringtest.com/spm



Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more, please go to: pickeringtest.com/ebirst




Three Year Warranty

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for a period of three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available for all our modules and systems with various levels to suit your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years. To learn more, please go to: pickeringtest.com/support

Available Product Resources

We have a large library of product resources including success stories, product and support videos, articles, as well as complete product catalogs and product reference maps to assist when looking for the switching, simulation and cable and connector solutions you need. We have also published handy reference books on Switching Technology and for the PXI and LXI standards.

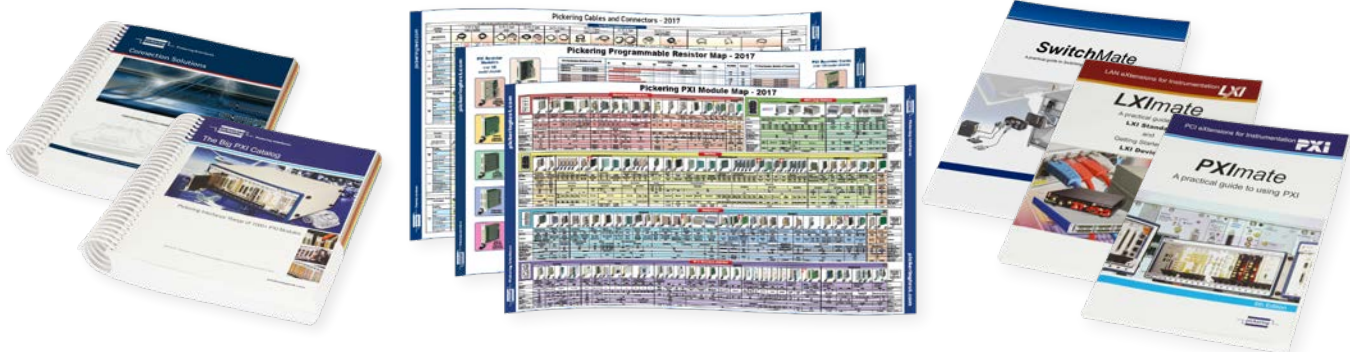

To view, download or request any of our product resources, please visit: pickeringtest.com/resources

© Copyright (2020) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.