


- **Versatile Multiplexer - for Now & The Future**
- Flexible Software Configured Architecture Can be Set To Different Configurations As Needs Change
- 16-Bank 4-Channel 2-Pole Multiplexers With Inter-bank Connection Switching
- Many Different Configurations up to a Single 64-Channel 2-Pole Multiplexer, Including Mixed Channel Count & Custom Configurations
- Maximum Current 2 A Hot or Cold Switching
- Switch up to 300 VDC/250 VAC & up to 60 W Max Power
- VISA, IVI & Kernel Drivers Supplied for Windows
- Supported by PXI or LXI Chassis
- Supported by *eBIRST*™
- 3 Year Warranty

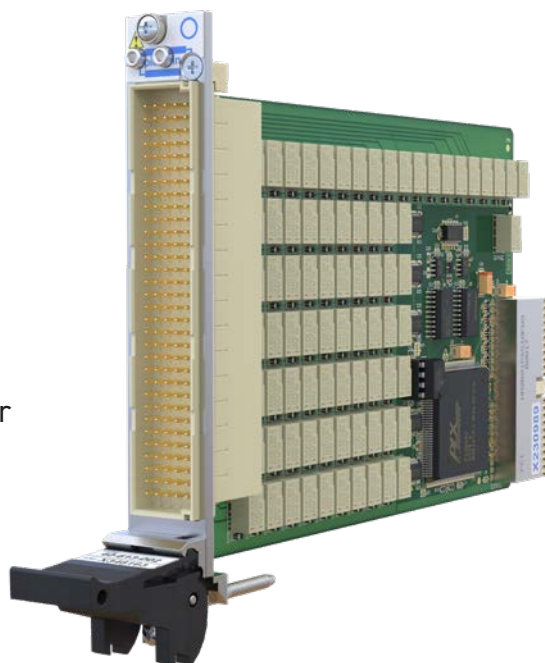

The 40-613A Very High Density Versatile Multiplexer module features a wide range of software selectable switching configurations. It is especially useful where a high density MUX array is required that can adapt to different test configurations for different test targets, or where a test system may have to be reconfigured in the future. Typical applications include signal routing in ATE and data acquisition systems. The 40-613A uses high quality electro-mechanical relays, connections are via a front panel 160-pin DIN41612 connector.

MUX Configurations

The module can be software configured into one of a large number of different 2-pole multiplexers. Inter-bank switching allows a maximum of 64 channels (refer to schematic diagram). Larger multiplexers may be constructed by daisy chaining the common signals from multiple modules.


The 40-613A can be operated as a conventional multiplexer with break-before-make action when a new channel is selected. Alternatively, product variants can be supplied that allow multiple channels to be simultaneously selected.


Typical Configurations
16 Banks, 4 Channels, 2-Pole
8 Banks, 8 Channels, 2-Pole
4 Banks, 16 Channels, 2-Pole
2 Banks, 32 Channels, 2-Pole
1 Bank, 64 Channels, 2-Pole

Supported by *eBIRST*

eBIRST test tools simplify fault-finding by quickly testing the system and graphically identifying the faulty relay.

For more information go to: pickeringtest.com/ebirst

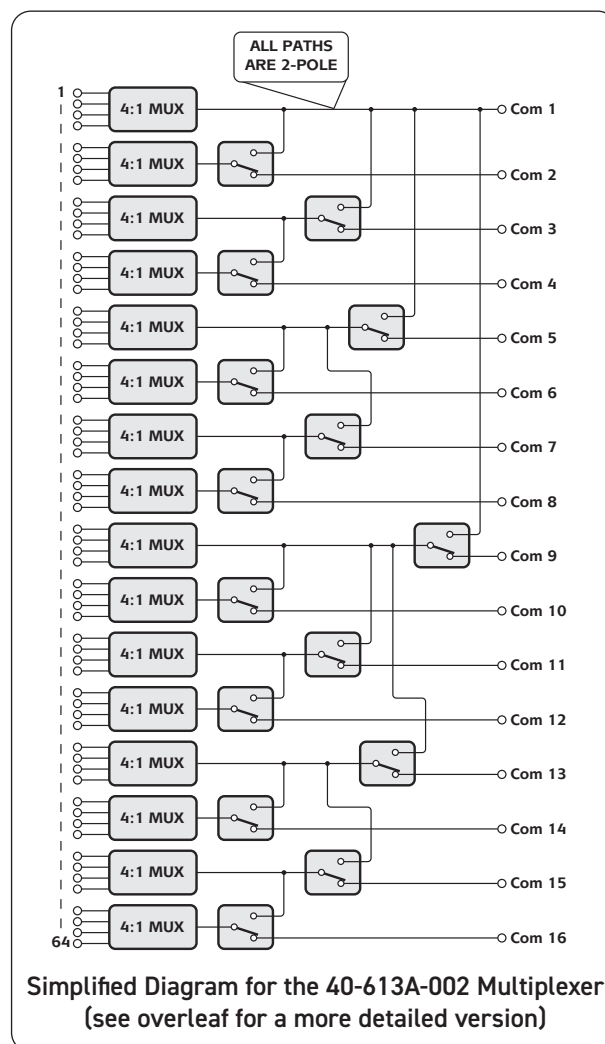

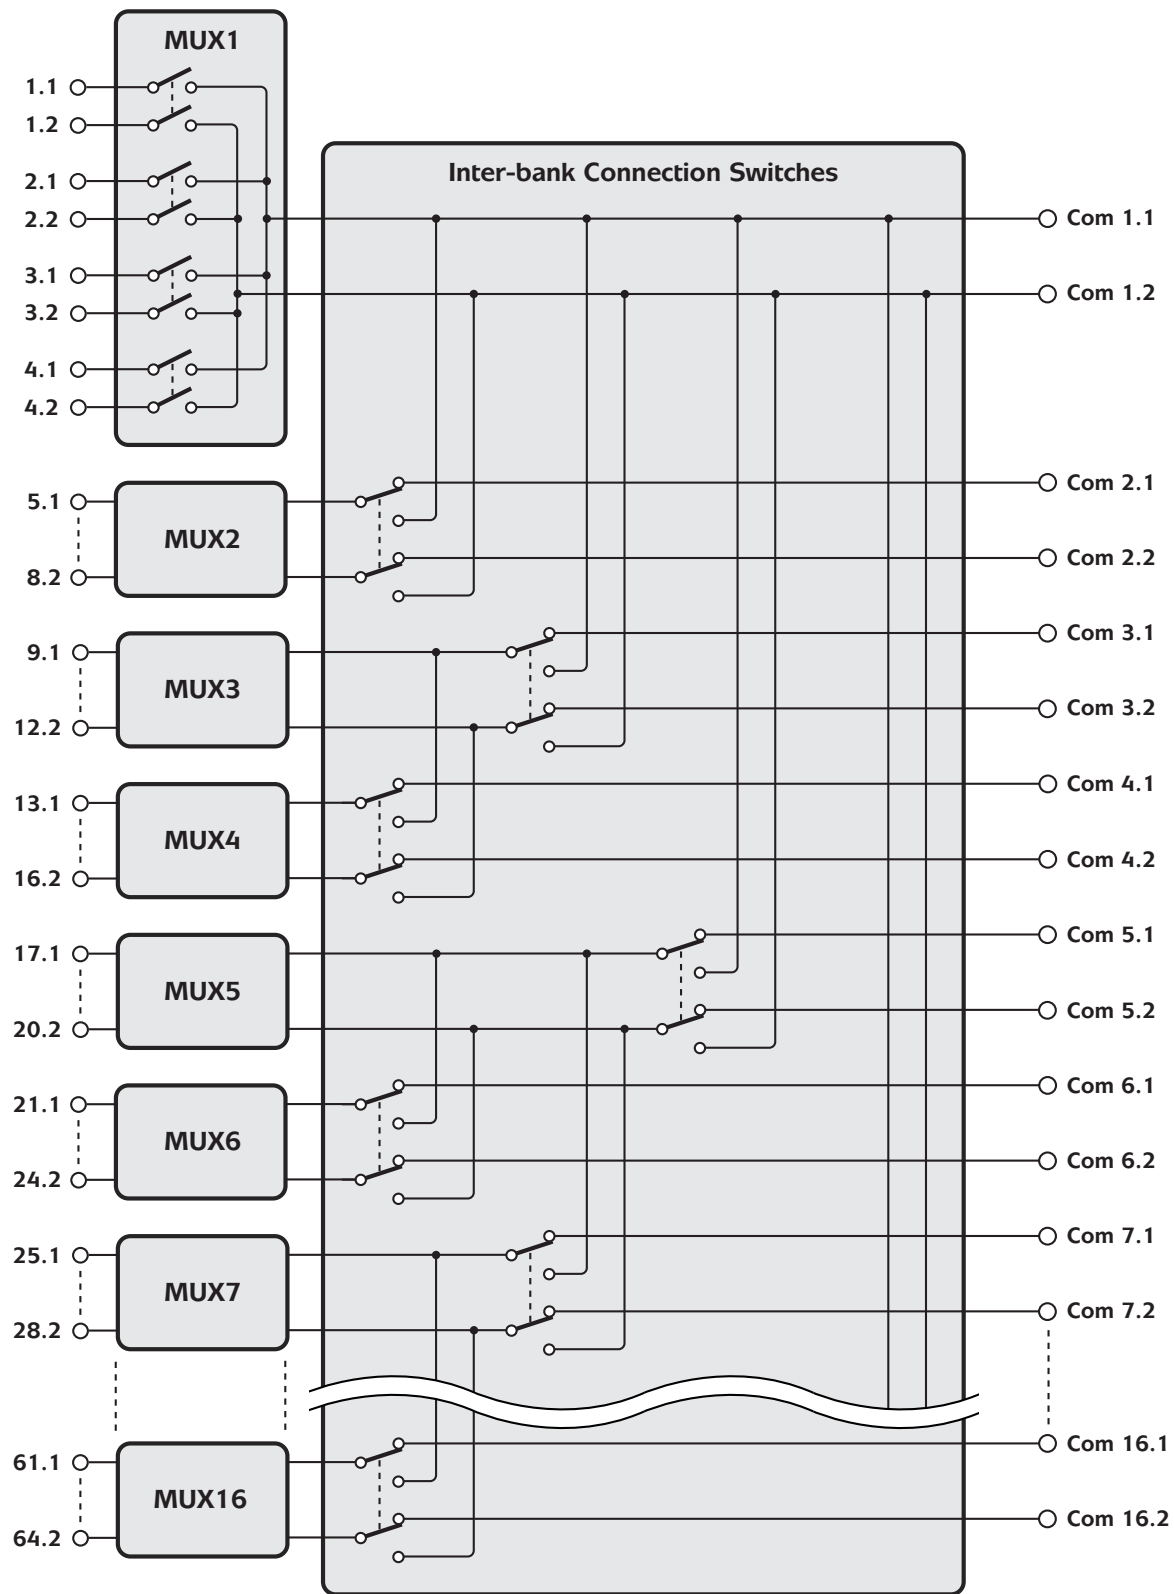

Detailed Switching Diagram for the 40-613A-002 Very High Density
16 Bank, 4 Channel, 2-Pole Versatile Multiplexer

Relay Type

The 40-613A is fitted with electro-mechanical 2-pole relays with palladium-ruthenium gold covered contacts. A spare relay is built onto the circuit board to allow easy maintenance with minimum downtime.

Switching Specification

Switch Type:	Electro-mechanical
Contact Type:	Palladium-Ruthenium, Gold Covered Bifurcated
Max Switch Voltage:	300 VDC/250 VAC*
Max Power:	62.5 VA, 60 W from 30 V to 220 VDC, 30 W to 300 VDC (resistive load)
Max Switch Current:	2 A
Max Continuous Carry Current:	2 A
Max Pulsed Carry Current Example (for a single switch path):	6 A for 100 ms (up to 10 % duty cycle)
Initial Path Resistance - On:	300 mΩ max, 200 mΩ typ†
Path Resistance - Off:	>10 ⁹ Ω
Minimum Voltage:	100 μV
Differential Thermal Offset:	<10 μV †
Operate Time:	6 ms typical
Expected Life (operations)	
Very low power signal load:	>1×10 ⁸
Low power load (2W):	>1.5×10 ⁷ (0.1 A 20 VDC)
Medium power load (30W):	>5×10 ⁶ (1 A 30 VDC)
Full power load (60W):	>1×10 ⁵ (2 A 30 VDC)
	>1×10 ⁵ (0.1 A 300 VDC)

* For full voltage rating, signal sources to be switched must be fully isolated from mains supply and safety earth.

† Path resistance & thermal offset are dependent upon the signal route selected.

Power Requirements

+3.3 V	+5 V	+12 V	-12 V
5m A	2 A max (typ 280 mA)	0	0

Mechanical Characteristics

Single slot 3U PXI (CompactPCI card).
3D models for all versions in a variety of popular file formats are available on request.

Connectors

PXI bus via 32-bit P1/J1 backplane connector.
Signals via front panel 160-pin male DIN 41612 connector, for pin outs please refer to the operating manual.

We recommend that Pickering mating connectors are used with this module which are designed to ensure there are no mechanical interference problems when used in a PXI chassis.

Operating/Storage Conditions

Operating Conditions

Operating Temperature: 0 °C to +55 °C
Humidity: Up to 90 % non-condensing
Altitude: 5000 m

Storage and Transport Conditions

Storage Temperature: -20 °C to +75 °C
Humidity: Up to 90 % non-condensing
Altitude: 15000 m

PXI & CompactPCI Compliance

The module is compliant with the PXI Specification 2.2.
Local Bus, Trigger Bus & Star Trigger are not implemented.
Uses a 33 MHz 32-bit backplane interface.

Safety & CE Compliance

All modules are fully CE compliant and meet applicable EU directives: Low-voltage safety EN61010-1:2010, EMC Immunity EN61326-1:2013, Emissions EN55011:2009+A1:2010.

Product Order Codes - Versatile Multiplexer

Channel Selection	Model Variant	Order Code
Single	16-Bank, 4-Channel, 2-Pole	40-613A-002

Note: The above module is available in multiple channel selection mode by adding the "-M" suffix to the part number.

Product Customization

Pickering modules are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

Customization can include:

- Alternative relay types
- Mixture of relay types
- Alternative number of relays
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.

Support Products

eBIRST Switching System Test Tool

This product is supported by the **eBIRST** test tools which simplify the identification of failed relays, the required **eBIRST** tools are below. Note; for the single channel selection mode version of this module (those without the -MUX suffix) eBIRST will, when applicable, confirm if a failure is present but is unable to localise it to a specific component.

For more information go to: pickeringtest.com/ebirst

Product	Test Tool	Adaptor
40-613A	93-002-001	93-002-410

Spare Relay Kits

Kits of replacement relays are available for the majority of Pickering's switching products, simplifying servicing and reducing down-time.

Product	Relay Kit
40-613A	91-100-001


For further assistance please contact our sales office.

Mating Connectors & Cabling

For connection accessories for the 40-613A module please refer to the [90-001D](#) 160-pin DIN 41612 Connector data sheet where documentation and a list of accessories can be found, or refer to the Connection Solutions catalog.

Soft Front Panel For The Versatile MUX

The Versatile Multiplexer Soft Front Panel for the 40-613A-002 allows easy setting of various configurations from a 16-bank 4-channel 2-pole multiplexer, up to a 1-bank 64-channel 2-pole multiplexer as well as individual relay control for custom configurations. The schematic in the background of the SFP simplifies understanding of the selected topology. During configuration setting, all relay control information is logged in a text file which can be re-used in a programming environment.

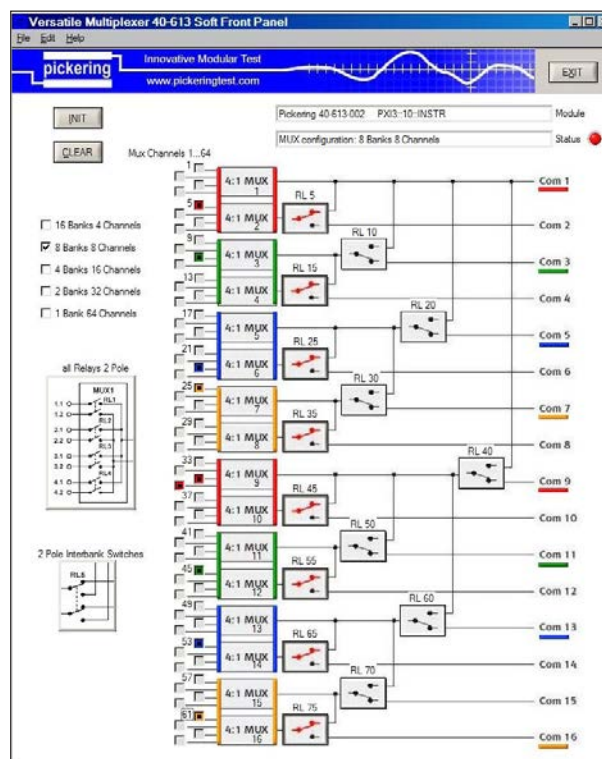

Soft Front Panel for the 40-613A Very High Density 2-Pole Versatile Multiplexer

Chassis Compatibility

This PXI module must be used in a suitable chassis. It is compatible with the following chassis types:

- All chassis conforming to the 3U PXI and 3U Compact PCI (cPCI) specification
- Legacy and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis
- Pickering Interfaces LXI or LXI/USB Modular Chassis

Chassis Selection Guide

Standard PXI or hybrid PXIe Chassis from any Vendor:

- Mix our 1000+ PXI switching & simulation modules with any vendor's PXI instrumentation
- Embedded or remote Windows PC control
- Real-time Operating System Support
- High data bandwidths, especially with PXI Express
- Integrated module timing and synchronization

Pickering LXI or LXI/USB Modular Chassis—only accept our 1000+ PXI Switching & Simulation Modules:

- Ethernet or USB control enables remote operation
- Low-cost control from practically any controller
- LXI provides manual control via Web browsers
- Driverless software support
- Power sequencing immunity
- Ethernet provides chassis/controller voltage isolation
- Independence from Windows operating system



Connectivity Solutions


We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with 1200+ products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules.



Connectors & Backshells



Multiwire Cable Assemblies



RF Cable Assemblies



Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications. Visit: pickeringtest.com/cdt to start your design.

Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for a PXI or LXI based test system. Our modules are fully supported by both Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature **SoftCenter™** technology, ensuring long service life and repeatable contact performance. To learn more, please go to: pickeringrelay.com



Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions. For a list of all supporting operating systems, please see: pickeringtest.com/os

The VISA driver is also compatible with Real-Time Operating Systems such as LabVIEW RT. For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:


- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++)
- **Keysight** VEE and OpenTAP
- **Mathworks** Matlab
- **Marvin** ATEasy
- **MTQ Testsolutions** Tecap Test & Measurement Suite

Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments, please go to: pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development. To learn more, please go to: pickeringtest.com/spm

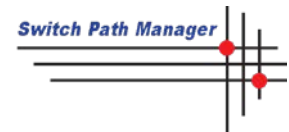

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more, please go to: pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for a period of three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available for all our modules and systems with various levels to suit your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years. To learn more, please go to: pickeringtest.com/support

Available Product Resources

We have a large library of product resources including success stories, product and support videos, articles and white papers as well as application specific product brochures to assist when looking for the switching, simulation and connection solutions you need. We have also published handy reference books on Switching Technology and for the PXI and LXI standards.



To view, download or request any of our product resources, please visit: pickeringtest.com/resources